



CorePro LED PLC

CorePro LED PLC CorePro LED PLC 8.5W 840 2P G24d-3

Philips CorePro LED PLC is the ideal uplampping solution for downlights in a wide range of general lighting applications. It integrates a LED light source into a traditional fluorescent form factor to offer superb energy savings over a lifetime that's twice as long as fluorescent alternatives.

Product data

General Information		Power Factor (Nom)		0.9
Cap-Base	G24D-3 [G24d-3]	Voltage (Nom)		220-240 V
Nominal Lifetime (Nom)	30000 h	Temperature		
Switching Cycle	50000X	T-Ambient (Max)		35 °C
B50L70	30000 h	T-Ambient (Min)		-20 °C
Light Technical		T-Storage (Max)		65 °C
Color Code	840 [CCT of 4000K]	T-Storage (Min)		-40 °C
Luminous Flux (Nom)	1000 lm	T-Case Maximum (Nom)		75 °C
Luminous Flux (Rated) (Nom)	1000 lm	Controls and Dimming		
Correlated Color Temperature (Nom)	4000 K	Dimmable		No
Color Consistency	<6	Mechanical and Housing		
Color Rendering Index (Nom)	83	Product Length		200 mm
LLMF At End Of Nominal Lifetime (Nom)	70 %	Approval and Application		
Operating and Electrical		Energy Saving Product		Yes
Input Frequency	50 to 60 Hz	Energy Efficiency Label (EEL)		A+
Power (Rated) (Nom)	8.5 W	Approval Marks		TUV CE marking RoHS compliance KEMA Keur certificate
Lamp Current (Max)	43 mA			
Lamp Current (Min)	33 mA			
Starting Time (Nom)	0.5 s			
Warm Up Time to 60% Light (Nom)	0.5 s			

CorePro LED PLC


Energy Consumption kWh/1000 h	11 kWh
Product Data	
Full product code	871869654125800
Order product name	CorePro LED PLC CorePro LED PLC 8.5W 840 2P G24d-3
EAN/UPC - Product	8718696541258

Order code	929001201302
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001201302
Net Weight (Piece)	0.090 kg

Warnings and Safety

- NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.



Dimensional drawing



LEDtube PLC 8.5W G24d-3/840 2P

Product	D1	D2	A1	A2	A3
CorePro LED PLC CorePro LED PLC 8.5W 840 2P G24d-3	24.3 mm	28.4 mm	128.8 mm	148 mm	170.6 mm


Photometric data

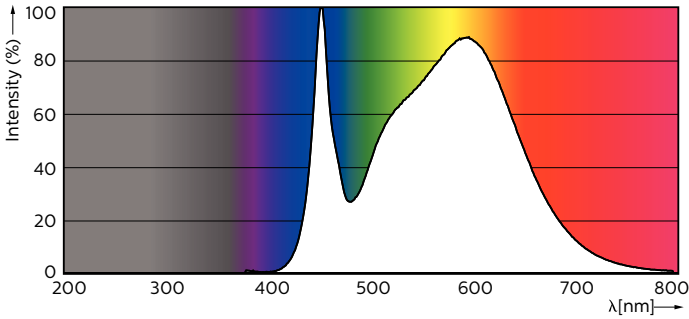

LEDtube PLC 100mm 9W G24Q-3 840 1000lm


CorePro LED PLC

Photometric data

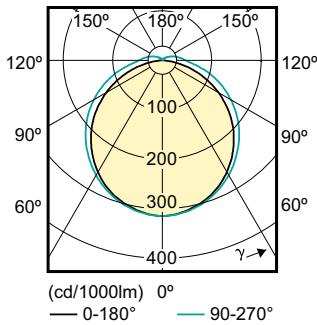


PLC /830, /840


Lifetime

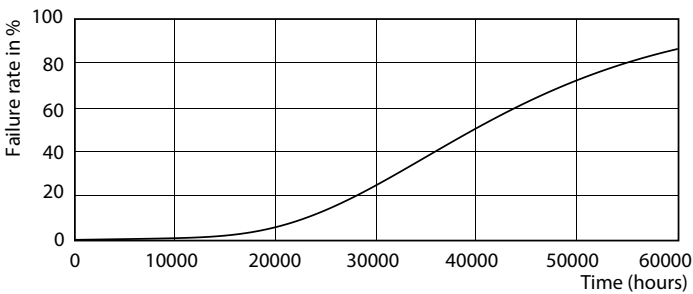


LEDtube PLC 100mm 9W G24D-3 830 950lm

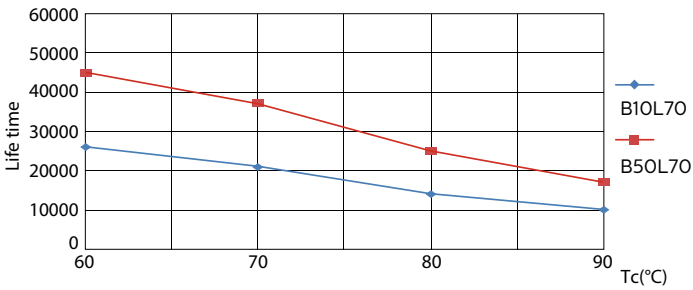

LEDtube PLC 100mm 9W G24D-3 830 950lm

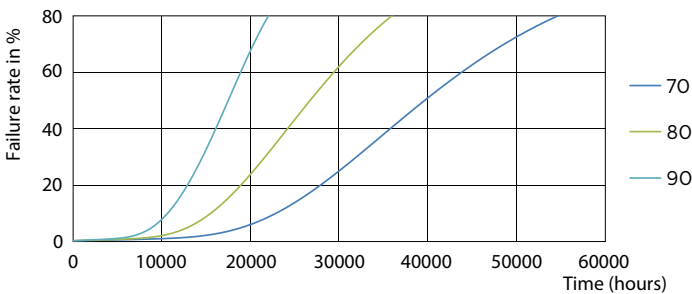


LEDtube PLC 100mm 9W G24D-3 830 950lm

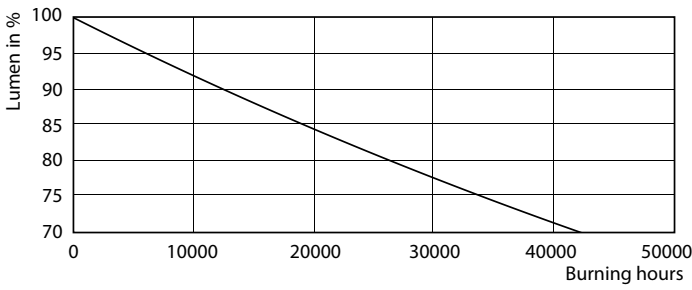

LEDtube PLC 100mm 9W G24D-3 830 950lm

CorePro LED PLC

Lifetime

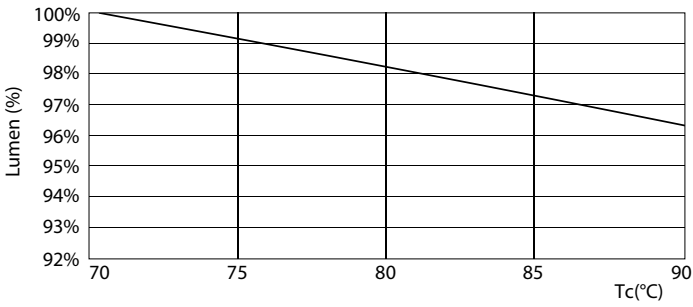

LEDtube PLC 100mm 9W G24D-3 830 950lm

