



MASTER VALUE LEDspot MV

MAS LED spot VLE D 4.9-50W GU10 940 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE LEDspot MV is a perfect for spot lighting. Thanks to its high CRI, it realizes more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. These LEDspots have the familiar look and feel of glass spots, keeping the classic beauty of glass spots and adding the strong performance from LED technology. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers.

Product data

General Information		LLMF At End Of Nominal Lifetime (Nom)	
Cap-Base	GU10 [GU10]		70 %
Nominal Lifetime (Nom)	25000 h	Luminous Flux in 90° Cone (Rated)	380 lm
Switching Cycle	50000X	Operating and Electrical	
Technical Type	4.9-50W	Input Frequency	50 to 60 Hz
Light Technical		Power (Rated) (Nom)	4.9 W
Color Code	940 [CCT of 4000K]	Lamp Current (Nom)	27 mA
Beam Angle (Nom)	36 °	Wattage Equivalent	50 W
Luminous Flux (Nom)	380 lm	Starting Time (Nom)	0.5 s
Luminous Flux (Rated) (Nom)	380 lm	Warm Up Time to 60% Light (Nom)	0.5 s
Luminous Intensity (Nom)	700 cd	Power Factor (Nom)	0.8
Color Designation	Cool White (CW)	Voltage (Nom)	220-240 V
Rated Beam Angle	36 °	Temperature	
Correlated Color Temperature (Nom)	4000 K	T-Case Maximum (Nom)	80 °C
Luminous Efficacy (rated) (Nom)	85.71 lm/W		
Color Consistency	<6		
Color Rendering Index (Nom)	90		

MASTER VALUE LEDspot MV

Controls and Dimming

Dimmable Yes

Approval and Application

Suitable For Accent Lighting Yes

Energy Efficiency Label (EEL) A+

Energy Consumption kWh/1000 h 5 kWh

Product Data

Full product code 871869670789000

Order product name MAS LED spot VLE D 4.9-50W GU10 940 36D

EAN/UPC - Product 8718696707890

Order code 929001349002

Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 10


Material Nr. (12NC) 929001349002

Net Weight (Piece) 0.038 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



GU10 230V5W-50W 365lm 36D 4000K GU10 Dim

Product	D	C
MAS LED spot VLE D 4.9-50W GU10 940 36D	50 mm	54 mm


Photometric data

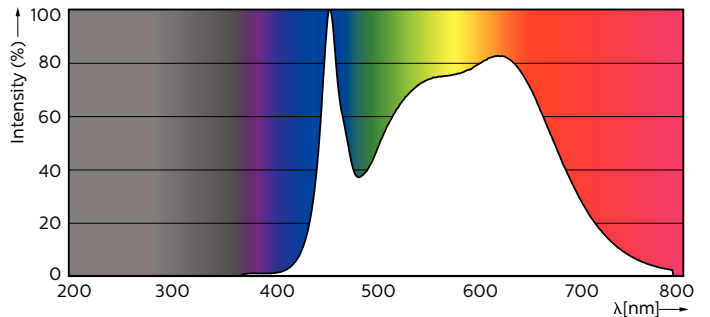

MASTER LEDspotMV 35W GU10 940 36D 285lm


MASTER VALUE LEDspot MV

Photometric data




MASTER LEDspotMV 50W GU10 36D 355lm

Lifetime

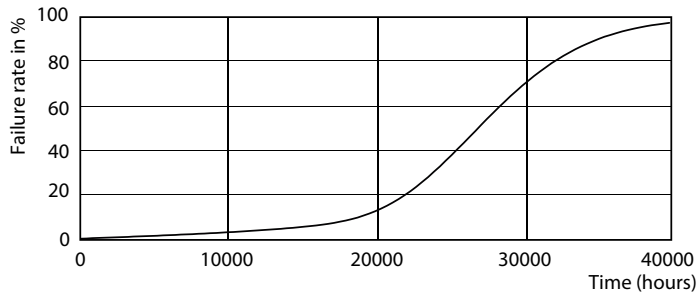

MASTER LEDspotMV GU10 922-927 36D

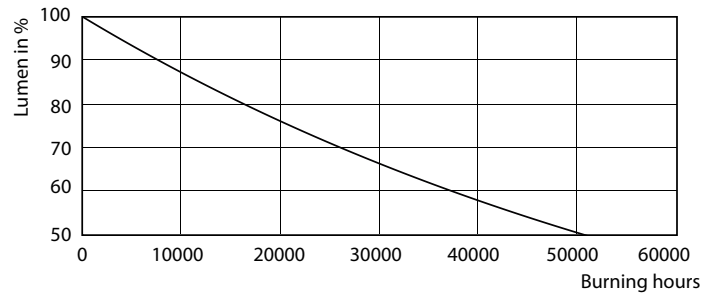

MASTER LEDspotMV GU10 922-927 36D

