



Brilliantline Dichroic

Brilliantline Dichroic 35W GU4 12V 10D 1CT/10X5F

Superior-quality low-voltage halogen burner in glass reflector. Ideal solution for small decorative luminaires, putting your objects in the spotlight. Dichroic coating prevents heat transmission onto the object.

Product data


General Information	
Cap-Base	GU4 [GU4]
Philips Code	14626
Operating Position	UNIVERSAL [Any or Universal (U)]
ANSI Code Halogen	FTE
Nominal Lifetime (Nom)	4000 h
Switching Cycle	16000X
Light Technical	
Beam Angle (Nom)	10 °
Luminous Flux (Rated) (Nom)	345 lm
Luminous Intensity (Max)	6000 cd
Rated Beam Angle	10 °
Correlated Color Temperature (Nom)	3000 K
Color Rendering Index (Nom)	100
LLMF at End of Nominal Lifetime (Min)	80 %
Luminous Flux in 90° Cone (Rated)	345 lm
Operating and Electrical	
Power (Rated) (Nom)	35.0 W
Lamp Current (Nom)	2.9 A
Starting Time (Nom)	0.0 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	1

Voltage (Nom)	12 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Approval and Application	
Energy Efficiency Label (EEL)	C
Energy Consumption kWh/1000 h	37 kWh
Luminaire Design Requirements	
Bulb Temperature (Max)	300 °C
Cap-Base Temperature (Max)	350 °C
Product Data	
Full product code	871150042543060
Order product name	Brilliantline Dichroic 35W GU4 12V 10D 1CT/10X5F
EAN/UPC - Product	8711500425430
Order code	924051417102
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50

Brilliantline Dichroic

Material Nr. (12NC)	924051417102
Net Weight (Piece)	14.100 g
ILCOS Code	HRGS-35-12-GU4-35/10



Dimensional drawing



DICHRO Pro 14626 35W GU4 12V MR11 10D

Product	D (max)	C (max)
Brilliantline Dichroic 35W GU4 12V 10D 1CT/10X5F	35 mm	40 mm

Photometric data

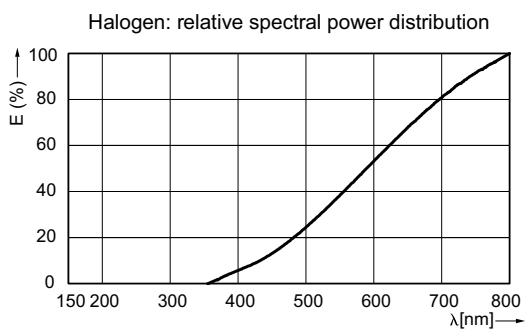

Halogen Dichroic 35W 10D

