



TL-M Rapid Start Standard Colours

TL-M RS 40W/33-640 SLV/25

The TL-M RS (Rapid Start) lamp (tube diameter 38 mm) has an external silicon coating and an external ignition strip. It is suitable for situations where low temperatures and high humidity require fast and stable ignition but color rendering is not important. Rapid Start lamps can be ignited without a starter.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	13000 h
System Description	Rapid Start
Light Technical	
Color Code	33-640
Luminous Flux (Nom)	2850 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	73 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	81 %
Correlated Color Temperature (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	72 lm/W
Color Rendering Index (Nom)	63
Operating and Electrical	
Power (Rated) (Nom)	39.5 W
Lamp Current (Nom)	0.430 A
Voltage (Nom)	101 V

Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	8.0 mg
Energy Consumption kWh/1000 h	47 kWh


Product Data	
Full product code	871150072429840
Order product name	TL-M RS 40W/33-640 SLV/25
EAN/UPC - Product	8711500724298
Order code	928030503371
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928030503371
Net Weight (Piece)	273.600 g
ILCOS Code	FD-40/41/2B-LC/P-G13

TL-M Rapid Start Standard Colours

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-M RS 40W/33-640	40.5 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
SLV/25					

TL-M 40W/33-640 RS

Photometric data

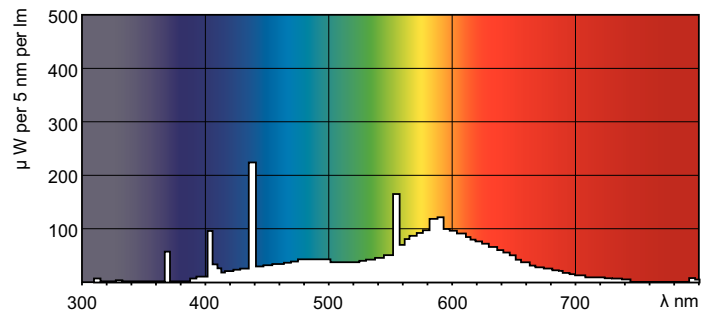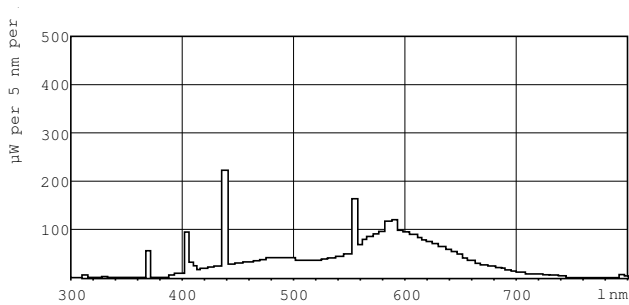

Lightcolor /33-640

Lightcolor /33-640

